



EnviroStor™ Solar Water Heater

Featuring...

**High Capacity 1.5" Internal Coil Heat Exchanger with Optional
4500W Supplemental Electric Heating Element and
Second Coil Heat Exchanger for Auxiliary Heat Source**







- ◆ **C₂glass®** - porcelain fused-to-steel is impervious to chlorine and caustics - ***the ideal water vessel***
- ◆ 50 to 119 gallon capacities
- ◆ 4500W electric heating element
- ◆ 1" NPT connections
- ◆ **ecomate®** insulation
- *Does not contribute to global warming*
- ◆ Steel exterior with powder coat finish
- ◆ Two magnesium anodes
- ◆ Factory installed brass drain valve
- ◆ Factory installed T&P valve
- ◆ Precision manufactured tank - high quality steel to assure strength and durability
- ◆ **6-Year tank and heat exchanger warranty - residential application**
- ◆ **3-Year tank and heat exchanger warranty - non-residential application**



We take water heaters very personally!



This product is available from:

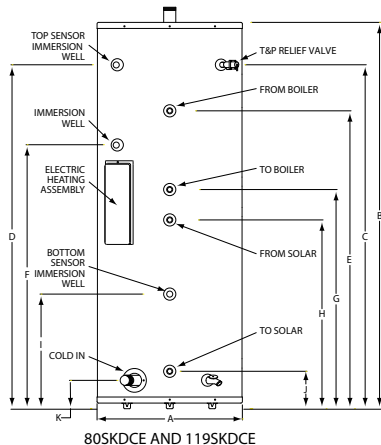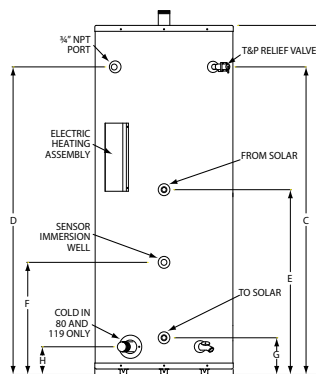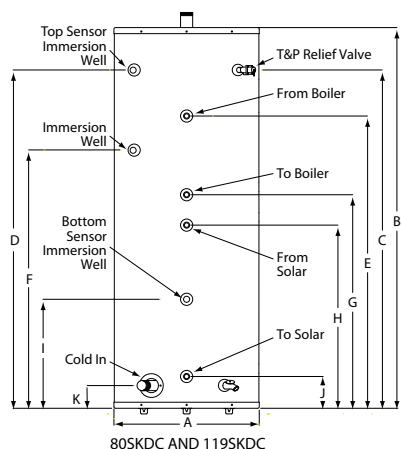

Model	Electric Element	Number of Coils	Storage GAL (L)	Dimensions in Inches (cm)										Shipping Weight LBS (kg)	
				A	B	C	D	E	F	G	H	I	J		K
50SKE	X	1	45 (170.34)	22.00 (55.88)	48.25 (122.56)	39.75 (100.97)	39.75 (100.97)	31.50 (80.01)	16.75 (42.55)	6.50 (16.51)	N/A	N/A	N/A	N/A	241 (109.32)
80SKE	X	1	75 (283.91)	24.00 (60.96)	64.00 (162.56)	57.12 (145.08)	57.12 (145.08)	31.50 (80.01)	19.25 (48.90)	6.50 (16.51)	5.00 (12.70)	N/A	N/A	N/A	307 (139.25)
80SKDC		2	73 (276.34)	24.00 (60.96)	64.00 (162.56)	57.12 (145.08)	57.12 (145.08)	49.50 (125.73)	46.87 (119.05)	36.50 (92.71)	31.50 (80.01)	19.25 (48.90)	6.50 (16.51)	5.00 (12.70)	327 (148.32)
80SKDCE	X	2	73 (276.34)	24.00 (60.96)	64.00 (162.56)	57.12 (145.08)	57.12 (145.08)	49.50 (125.73)	46.87 (119.05)	36.50 (92.71)	31.50 (80.01)	19.25 (48.90)	6.50 (16.51)	5.00 (12.70)	337 (152.86)
119SKE	X	1	110 (416.40)	28.00 (71.12)	65.00 (165.10)	57.75 (146.69)	57.75 (146.69)	33.75 (85.73)	16.25 (41.28)	8.75 (22.23)	6.50 (16.51)	N/A	N/A	N/A	407 (184.61)
119SKDC		2	108 (408.82)	28.00 (71.12)	65.00 (165.10)	57.75 (146.69)	57.75 (146.69)	51.75 (131.45)	49.12 (124.76)	38.75 (98.43)	33.75 (85.73)	16.25 (41.28)	8.75 (22.23)	6.50 (16.51)	427 (193.68)
119SKDCE	X	2	108 (408.82)	28.00 (71.12)	65.00 (165.10)	57.75 (146.69)	57.75 (146.69)	51.75 (131.45)	49.12 (124.76)	38.75 (98.43)	33.75 (85.73)	16.25 (41.28)	8.75 (22.23)	6.50 (16.51)	437 (198.22)

Warning: Installation should be in accordance with all national and/or local codes. In the absence of local codes, refer to NFPA 54 or ANSI Z21.10.1.

Caution: The recommended maximum hot water temperature setting for normal residential use is 120°F. Manufacturer recommends a tempering valve or anti-scald valve be installed and used according to the manufacturer's directions to prevent scalding.

Pressures (all): Working pressure, 150 psi; testing pressure, 300 psi

Electrical Rating: ("E" models only): 4.5 kW, 240V

www.bockwaterheaters.com
110 South Dickinson Street, Madison, Wisconsin 53703
Toll Free 800-794-2491 • Phone 608-257-2225 • Fax 608-257-5304

Doc# ES102 SK Rev. 11/13